

AMIKA IN

BID SPECIFICATIONS



AMIKA IN PASTRY 161 - Peach

AMIKA IN PASTRY

Pastry display cabinet with fan ventilated refrigeration

One piece body with ecological polyurethane insulation. Display base, working top and rear panel in stainless steel 18 gauge AISI 304, external base in painted sheet. Stainless Steel pull out drawers as option. Upper structure with profiles in silver colored anodized aluminium, with 1 shelf.

Tempered glasses with lift-up opening system by pistons. Light heading in silver-colored anodized aluminium. Neon lighting standard or LED (option). Closure on the operator side with self-retracting curtain or sliding doors (option). Main structure and frame in carbon steel painted with epoxy powder. Adjustable feet or pivoting castors as option. Control board on the operator side and digital temperature indicator.

STANDARD FEATURES

Energy Efficient

Automatic evaporator probe activated Electric defrost system. Large evaporator finned evaporator to maintain humidity level upon display surfaces.

High Performance

One piece molded body using 3' ecologic polyurethane insulation. Climatic class 4 (+86 F / 55% R.H.)

Defrosting System

Electric Defrost. Two control systems: manual or automatic (standard).

Power

High Performance condensing unit with hermetic compressor.

Temperature Equalized

Oversized finned evaporator. Product holding / display area is fan ventilated back to front air flow system to ensure equalized consistent temperature.

OPTIONS

LIGHTING

LED lighting (top + shelf)

CASTORS

Pivoting castors (2 with brake)

CONDENSING SYSTEM

Water cooled condensing system. Remote condensing unit;


EVAPORATION SYSTEM

Electric heated condensate pan

PACKAGING

Reinforced wood crate

SPEC SHEET

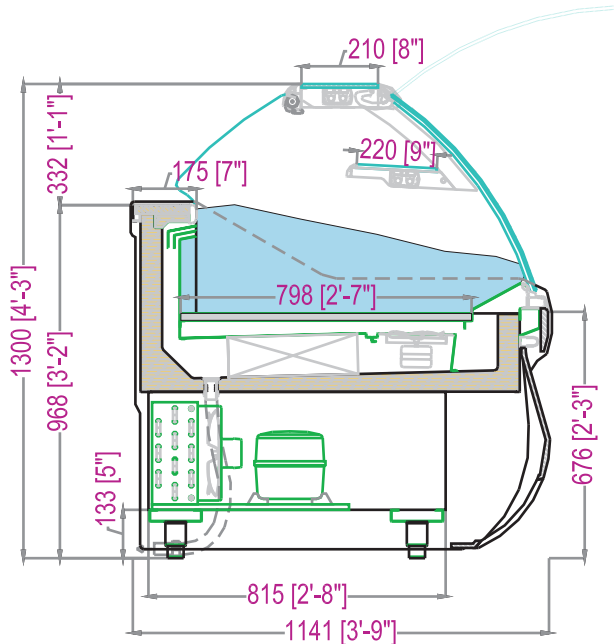

AMIKA IN PASTRY Cross Section




Pull out drawers - Option

KEY INFORMATION

TECHNICAL FEATURES		111	161	210
External dimensions (lxdxh) [#]	inches	3' 11" x 3' 9" x 4' 3"	5' 7" x 3' 9" x 4' 3"	7' 10" x 3' 9" x 4' 3"
Crated dimensions (lxdxh) [#]	inches	4' 7" x 4' 6" x 4' 11"	6' 3" x 4' 6" x 4' 11"	8' 5" x 4' 6" x 4' 11"
Refrigeration	type	Fan Ventilated	Fan Ventilated	Fan Ventilated
Operating temperature	F°	35	35	35
Compressor	type - N°	Hermetic - 1	Hermetic - 1	Hermetic - 1
Compressor (Pw H*-pw)	W - HP	510 - ½	690 - ¾	690 - ¾
Power supply	V-Ph-Hz	120 / 1 / 60	120 / 1 / 60	120 / 1 / 60
Electrical input (standard)	W-A	860 - 9,5	1150 - 10,5	1350 - 12,5
Defrost	mode / type	Automatic / Electric	Automatic / Electric	Automatic / Electric
Climatic class	N°	4	4	4
Operating conditions	F° - %HR	86 / 55	86 / 55	86 / 55
Refrigerant	type	R404A	R404A	R404A
Net weight	Lb	452	595	738
Crated weight	Lb	716	1036	1190

Electric Plug



The company reserves the right to make modifications to the products without prior notice.

* ASHRAE 32 condition

With Aesthetic panels

U.S.A. Distributor



UpperMidwestGourmet.com
1901 Traffic Street NE
Minneapolis MN 55413
612.728.7208

CIAM S.p.A.